



铝膜复卷机 | Aluminum foil rewinding machine (WT-A450)



Specification

- 1.This unit can quickly convert large rolls of aluminum foil into small rolls of aluminum foil. This machine refers to the advanced technology of Europe and Taiwan, and removes the complicated steps according to the actual needs of customers, making the machine a very simple and convenient operation device. Well received by the majority of customers.
2. This high-speed rewinder adopts the latest electronic/mechanical system, which is suitable for aluminum foil rewinding. It has a precise length counter, tension control and an LCD touch screen controlled by PLC. The operation is simple and easy to learn.
3. It has the functions of automatic automatic rewinding, automatic shutdown when the set length is reached, and automatic paper core replacement. It is a newly developed compact semi-automatic rewinder, suitable for aluminum foil and plastic wrap, kitchen foil rolls, bread foil rolls, catering foil rolls, household aluminum foil rolls, PE food wrap, PVC wrap, etc.
4. Frequency conversion control, adjustable speed range 0-500m/min.
5. Double-station rewinding. Can quickly change rolls.
- 6.Unique cylinder feeding method saves labor, very convenient.

产品特性

- 1、本机组可以把大卷的铝箔快速转换成小卷的铝箔。本机参考欧洲及台湾先进工艺的基础上，根据客户实际的需要，去掉的复杂的步骤，使机器变成一台非常简单易方 便操作的设备。深受广大客户的喜爱。
- 2、该高速复卷机采用最新的电子/机械系统，适用于铝箔复卷，它具有精确的长度计数器，张力控制和由PLC控制的LCD触摸屏，操作简单易学。
- 3、它具有自动自动复卷，达到设定长度时自动停机，自动更换纸芯等功能。它是新开发的紧凑型半自动复卷机，适用于铝箔和保鲜膜，厨房箔纸卷，面包箔纸卷，餐饮箔纸卷，家用铝箔卷，PE食品保鲜膜，PVC保鲜膜等。
- 4、变频控制，速度可调范围0-500m/min。
- 5、双工位收卷。可以快速换卷。
- 6、独特的气缸上料方式，节省劳动力。非常方便。

技术参数Technical data

Model	WT-A450
Jumbo roll width	200-450mm
Material thickness	7-50 micro
Jumbo core diameter	76mm/3inch
Jumbo roll outer diameter	800mm
Rewind roll inner paper core diameter	1inch/1.5inch/2inch
Speed	300m/min
Rewinding roll length	5-900m
Change roll method	Manual
Power	2.2 KW
Tension control torque	100N.M
Machine Dimension	1480*1300*1150mm
Weight	750kg

广东鑫诚机械制造有限公司

联系人：孔先生+86-13925858284
电话：0769-88763798 传真：0769-88763798
网址：www.wintechmc.com
地址：广东省东莞市高埗镇高埗中龙二路3号3号楼101室

WINTECH GROUP LIMITED CO.,LTD

Contact:Mr.Jack + 86-13925858284
Tel:0769-88875752 Fax: 0769-88763798
Web: www.wintechmc.com Whatsapp:0086-18688661131
Address: Room 101 NO.3 Zhonglong 2nd Road, Gaolong Ave, Gaobu Town, Dongguan, Guangdong, China

Turkey:

English Speaking: Mr.Jack Mobile: +5013465299
Address: No.219, 18th Floor 21 M ü cahitler, 72037. Sk No:2, 27060 Şehitkamil Gaziantep, Türkiye



广东鑫诚机械制造有限公司
WINTECH GROUP LIMITED



ABOUT US

Guangdong Wintech Machinery Co., Ltd is an intelligent equipment manufacturer focusing on development and production of automatic stretch film machines and rewinder. Our factory is located in Gaobu Town,Dongguan City,Guangdong Province which covers 3,000 square meters.

Since we established in Hong Kong in 2013, Our main products are stretch film machines and rewinders , including stretch film rewinding and slitting machines, pre-stretched film rewinder and aluminum foil rewinder. Products have been widely used in many fields such as industry, packing, food, logistic transportation, daily chemicals and so on. All of our product are exported to Southeast Asia, the Middle East, Africa, Europe, America and other parts of the world. We provide pre-sales consulting and after-sales maintenance services in Vietnam, India, Egypt, Turkey, Pakistan, Mexico ,the United States and other countries.



封底

封面



四轴智能高速缠绕膜机组

(WT 80/65/120/65-2400mm)

Four Shaft Intelligent High Speed Stretch Film Unit



- Model: WT 80/65/120/65-2400mm
- Motor Brand :Siemens
- Delta invertor
- JC times T die
- Vacuum system
- Hydrualic screen changer
- Automatic materials loader
- Automatic paper tube loading & unloading system

型号 Model:	WT-65/100/100/65*1850
模具 Width:	1850MM
螺杆 Diameter of screw :	65/100/100/65
膜层 Layer :	7层 ADCBCDA; 4层 AD BC
电机 Motor:	22KW/90KW/90KW/22KW
齿轮箱 Gear box :	173/280/280/173
设计线速 Line speed:	350m/min
产能 Capacity :	580kg/h (10-12T)
实际能耗 :Energy consumption	380-450kwh/T
总功率 Total Power:	436KW
冷却辊 (二条) Cooling Roller	1000mm*2000mm (主) 370mm*2000mm (副)
收卷辊 Rewind Roller:	四轴伺服收卷 Four shaft Servo winding
机器尺寸 (参考值) Machine size:	15.5*6.5*5m
机器毛重 (参考值) Weight:	35T
吸料机 Auto loader :	4 sets
边料回收机 Online recycling machine	1 set
静电锁边机 Static edge teaming device	1 set

STANDARD AUTOMATIC HIGH SPEED STRETCH FILM PRODUCTION LINE



- Motor Brand :Siemens
- Delta invertor
- JC times T die
- Vacuum system
- Hydrualic screen changer
- Automatic materials loader
- Automatic paper tube loading & unloading system

型号 Model:	WT-65/90/65-1850	WT-80/120/80-2400
制造层数 Layers	Three/Five Layers	Three/ Five Layers
螺杆直径 Screw Diameter:	65/90/65 mm	80/120/80 mm
螺杆长径比 Screw L/D:	30:1	30:1
制品宽度 Width:	1850mm	2400mm
主机电机功率: Motor power of main machine	22/55/22KW	37/132/37KW
制品厚度 Thickness:	0.008-0.05 mm	0.008-0.05 mm
产能 Capacity:	220KG/H	450KG/H
日产量 Daily output:	6T	11T
膜层结构 Layer Structure:	ABC/ACBCA	ABC/ACBCA
整机重量 Total Weight:	15 T	22 T
外形尺寸 (mm) Dimension:	13×3.4×3.5m	14×5.5×4.6m

WWW.WINTECHMC.COM

Contact: Mr. Jack
Mobile: + 8613925859284
Tel: + 86-769-88875752



最新款全自动高速拉伸膜/保鲜膜复卷机

New Technology Fully Automatic High Speed Stretch/Cling Film Rewinding Machine



Model 型号	WT-500N
Motor 电机	Servo motor
Speed 机器速度	1500m/min
Unwinding roll width 母卷宽度	300-500mm
Rewinding roll width 子卷宽度	300-500mm
Paper core diameter 纸轴直径	2", 3"
Power 功率	15KW
Voltage 电压	220/380/415V
Machine dimension 机器尺寸(L x W x H)	1.6x1.8x2m
Weight 重量	1200kg

产品特性

- 复卷机料斗容量为55pc;
- 母卷气动设置方便;
- 母卷宽度为300-500mm, 最大直径为450mm;
- 母卷易安装至放卷辊上, 复卷过程易操作;
- 复卷150m只需9秒;
- 母卷的位置通过触摸屏操作;
- 当料斗中的纸管用完, 母卷复卷完, 母卷中间拉断时, 收卷停止。

Specification

- The hopper capacity of the rewinder is 55pc;
- The unwinding roll pneumatic setting is convenient;
- The width of unwinding roll is 300-500mm, and the maximum diameter is 450mm;
- The unwinding roll is easy to install on the unwinding roller, and the rewinding process is easy to operate;
- It only takes 9 seconds to rewind 150m;
- The position of The unwinding roll is operated through the touch screen.
- When the paper core is used up, the unwinding roll is rewinded or broken, the rewinding machine will stop.



全自动拉伸膜/保鲜膜复卷机

Fully Automatic Stretch Film
Cling Film Rewinding Machine

(WT-F500)



Jumbo roll width	Max 500mm
Jumbo paper core diameter	3inch
Jumbo roll diameter	Max 475mm
Sub roll width	Max 500 mm
Sub roll paper core diameter	1.5/2/3inch
Sub roll length	1500m (Max)
Rewinding speed	1000-1200 m/min
Voltage	220/380/415V 3PH
Power	4Kw
Machine dimension	1350×1000×1050 mm
Weight	800Kg

半自动拉伸膜、保鲜膜分切复卷机

Semi Automatic Stretch Film
Cling Film Rewinding And Slitting Machine

(WT-S500/WT-S1000)


Machine Model 型号	WT-S1000	WT-S500
Maximum parent roll width 最大膜宽	1000mm	500mm
Parent roll paper core diameter 母卷纸芯直径	400mm	400mm
Slit&Rewind sub roll width 分切复卷宽度	50-1000mm	50-500mm
Rewind roll paper core diameter 子卷纸芯直径	1.5/2/3inch	1.5/2/3inch
Max diameter of rewind roll 复卷最大直径	300mm	300mm
Max speed 复卷速度	650m/min	650m/min
Dimension 外形尺寸	1.85*1.2*1.4m	1.35*1.2*1.4m
Weight 重量	1000KG	700KG



新环保造粒机

New-Tech Environmentally
Plastic Granulator/Pelletizer

(WT75/90/110/150)

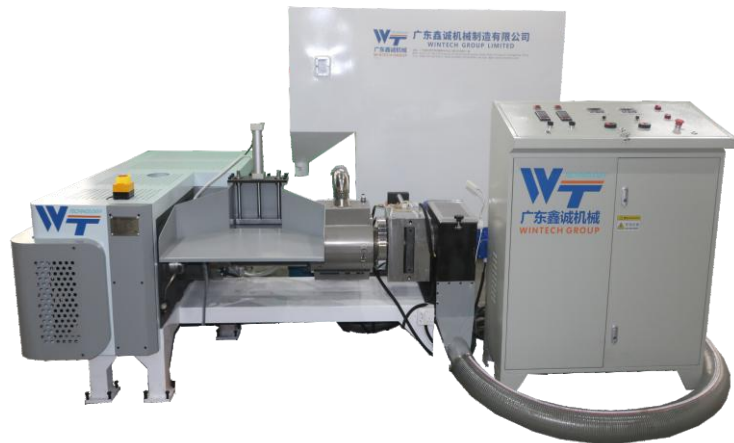

Model	WT-75/90/110/150
Screw diameter	75/90/110/150mm
Suitable for material	LDPE, HDPE, CPE, PVC, PE, TPU, PLA
Capacity	40kg-230kg
Extrusion motor	15KW-55KW
Voltage	380V 3PH
Power consumption	200~250KWH/Ton
Machine Weight	1000KG/1500/KG/1900KG/3200KG
Machine dimension	3m ² -10m ²